

Safety I/O DC 110 V Digital output

Wet type contact 4 ch

Summary



stNumber of output channels	:	4 ch (Channel individual insulation)		
* Contact	:	Wet type		
*Contact voltage	:	DC 110 V		
*Rating load	:	20 W/ch		
* User interface	:	Switch : 2 (Front panel upper side : for H/W reset, lower side : unused)		
*Module ambient temperature	:	-5 to 60℃		
$m{\star}$ In compliance with Functional Safety Standard IEC 61508				



MOVE THE WORLD FORW>RD MITSUBISHI HEAVY INDUSTRIES GROUP

Mitsubishi Power is a power solutions brand of Mitsubishi Heavy Industries.

 $\begin{array}{c} \textbf{CGS-S0804-E-09} \\ SL: 1 \\ \end{array} \begin{array}{c} (2023.\ 07.\ 31) \\ ECT: N/A \end{array}$



Safety I/O DC 110 V Digital output

Wet type contact 4 ch

■ Specifications

ľ	TEM	SPECIFICATION
	Number of channels	4 ch (Channel individual insulation)
	Contact	Wet type
	Rating contact voltage	DC 110 V
Output	Delay	Less than 2 msec
·	Rating load	20 W/ch
	Leakage current	1 mA or less @ DC 24 V
	Safe state	Terminal contacts open (De-energized "Open" contact), Communication cutoff
Data refresh cycle		2 msec
AD conversion type		$ onumber \Sigma$, Successive approximation register(SAR)
		DC 2 kV Internal circuit (CPU/FPGA) - I/O terminal
Isolation voltage		DC 2 kV I/O terminal – PE
-		DC 200 V Between I/O channels
User interface		Switch 2 (Front panel upper side: for H/W reset, lower side: unused)
		Redundant I/O circuit comparison check
		Redundant CPU comparison check
		Quadruplexed A/D converter comparison check
		ADC stuck check
		CRC check
		Data format check
		I/O signal range check
Self diagnosis		Watchdog timer
		Communication timeout check
		Redundant voltage monitor
		Clock abnormal check
		Functional check of the abnormal communication signal TPFS(Temporal Programming Flow Supervision): Loss-of-function check for system timers
		LPFS(Logical Programming Flow Supervision): Loss-of-function check for logical programming flow Open-wire/short-circuit check (Detected as read-back error of the output)
		Overvoltage protection
	Electrical	Overcurrent protection
Protection		Double-insulated
	Safety Function	Abnormal communication signal cutoff
		4 indicators: Power / Status / Network status A / Network status B
Indicators		4 indicators: IO status for each channel
Current consumption		3.7 A
Weight		Less than 300 g
Size		152.5 mm (D) x 94 mm (H) x 46 mm (W) (Protrusions excluded)
Certification body		TÜVSÜD
Safety integrity level	(IEC 61508-1)	SIL 3
EMC Zone	(EN 61131-2)	B (Dedicated power distribution, rated voltage: 300 V or less)
Overvoltage category	(IEC 60664-1)	II (Energy-consuming equipment to be supplied from the fixed installation)
IEC protection class	(IEC 60204-1)	II (Double insulated)
Isolation method		Channel individual insulation
Hot-swapping		Supported *However, depending on the field circuit and the application program
Resolution		16 bit *Two types of AD converters are duplexed.
Rated voltage		DC 24 V -15% to +20% (The voltage supplied from the backplane)
Environmental conditions	Module ambient temperature	(Operation) -5 to +60°C (Storage) -25 to +85°C
	Module ambient humidity	(Operating / Storage) 0 to 95% RH (No condensation)
Vibration		3.5 mm at 5 to 8.4 Hz, 1 G at 8.4 to 150 Hz
Shock		15 G 11 ms

About compliant module type

For compliant modules of this product, please refer to " Compliant backplane list (CGS-S9901-E-XX) ".

For compliant modules of this product, please refer to "Compliant accessory connector list (CGS-S9902-E-XX)".

DIASYS Netmation 4S=

MOVE THE WORLD FORW>RD MITSUBISHI HEAVY INDUSTRIES GROUP

Mitsubishi Power is a power solutions brand of Mitsubishi Heavy Industries.

CGS-S0804-E-09 (2023.07.31)



Safety I/O DC 110 V Digital output

Wet type contact 4 ch

Supported standards/Supported directives

Certified standard	Year	Title
IEC 61508	2010	Functional safety of electrical/electronic/programmable electronic safety-related systems
EN 61131-2	2007	Programmable controllers – Part 2: Equipment requirements and tests
IEC 61131-6	2012	Programmable controllers - Part 6: Functional safety
IEC 61511-1	2004	Functional safety - Safety instrumented systems for the process industry sector - Part 1: Framework, definitions, system, hardware and software requirements,
EN 50156-1	2004	Electrical equipment for furnaces and ancillary equipment - Part 1 : Requirements for application design and installation
ISO 13849-1	2008	Safety of machinery - Safety-related parts of control systems-Part 1:General principles for design
EN 54-2	2007	Fire detection and fire alarm systems Part 2: Control and indicating equipment

Supported directive	Year	Title
RoHS	2011	DIRECTIVE 2011/65/EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment
Low Voltage	2006	DIRECTIVE 2006/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 12 December 2006 on the harmonisation of the laws of Member States relating to Electrical Equipment designed for use within certain voltage limits
EMC	2004	DIRECTIVE 2004/108/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 15 December 2004 on the approximation of the laws of the Member States relating to electromagnetic compatibility and repealing Directive 89/336/EEC
Machinery	2006	DIRECTIVE 2006/42/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 17 May 2006 on machinery, and amending Directive 95/16/EC



MOVE THE WORLD FORW>RD MITSUBISHI HEAVY INDUSTRIES GROUP


Mitsubishi Power is a power solutions brand of Mitsubishi Heavy Industries.



Safety I/O DC 110 V Digital output

Wet type contact 4 ch

■Block diagram

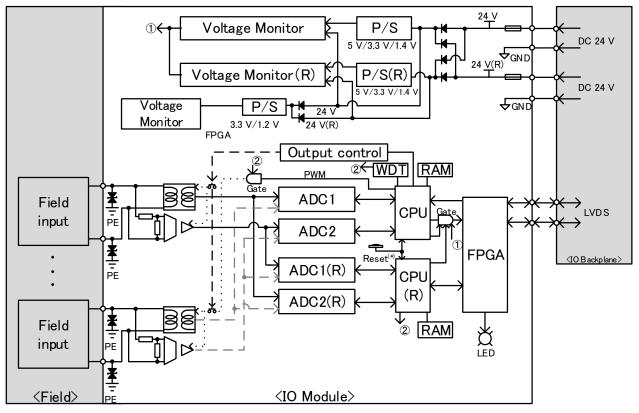

(*) Indicates the H/W reset switch on the upper side of the front panel.

:	Redundant
:	Power Supply
:	Low Voltage Differential Signaling
:	Field Programmable Gate Array
:	Central Processing Unit
:	Random Access Memory
:	Watch Dog Timer
:	Analog Digital Converter
:	Pulse Width Modulation
:	Buffer Gate
:	Light Emitting Diode
:	Ground
:	Protective Earth
:	Full Scale
:	Backplane
:	Resistor
:	Fuse
:	Zener diode
:	Transformer
	:

When using, please read the instruction manual attached to the product carefully and use it properly.

This catalog may not be distributed or reproduced in whole or in part without permission.

Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.

DIASYS Netmation/DIASYS Netmation4S is a registered trademark of Mitsubishi Heavy Industries, Ltd.

The service names and product names of other companies described in this catalog are the trademarks or registered trademarks of each company.



Mitsubishi Power is a power solutions brand of Mitsubishi Heavy Industries.

MOVE THE WORLD FORW>RD MITSUBISHI HEAVY INDUSTRIES GROUP

CGS-S0804-E-09 (2023.07.31)