


LSACT09-R IO backplane connector

Screw type, 0.25~2.5mm², Screw latch, 8 point fuse type, 16 pins

Summary

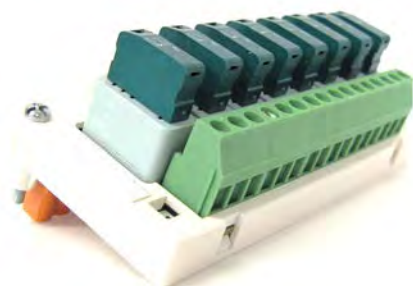


- * Wire holding structure : Screw type
- * Wire size(ferrule) : 0.25~2.5mm²
- * Connector rock method : Screw latch
- * Number of pins : 16

Specifications

ITEM		SPECIFICATION
Classification		8 point fuse type
Attachment position		IO backplane terminal(Right side)
Number of pins		16 (1 row)
Pitch		5.08mm
Wire holding structure		Screw type
Screw size		M3
Tightening torque		Minimum 0.5Nm, Maximum 0.6Nm
Rated voltage(IEC)		400VAC
Rated current(IEC)		3A
Dielectric strength		2300VAC (Between neighbor pins)
Wire size		Wire end ferrule with isolation cover 0.25~2.5mm ² (AWG23~AWG14) Flexible 0.2~2.5mm ² (AWG24~AWG14)
Stripping length		8mm
Protection		Safe from finger touch
Flamability class UL94		V-0
Compatible terminal bases		LSIOB01, LSIOB02
Environmental conditions	Ambient temperature	(Operating) Less than 5A : -5~60°C, (Storage) -25~55°C More than 6.3A : -5~50°C
	Ambient humidity	(Operating) Not specified (Storage) Less than 80%RH (No condensation)
Weight		0.12kg
Dimensions		49.0mmD x 46.5mmH x 102.0mmW (Except projection)

*About compliant module type

For compliant modules of this product, please refer to "Compliant accessory connector list (CGS-S9902-E-XX)".

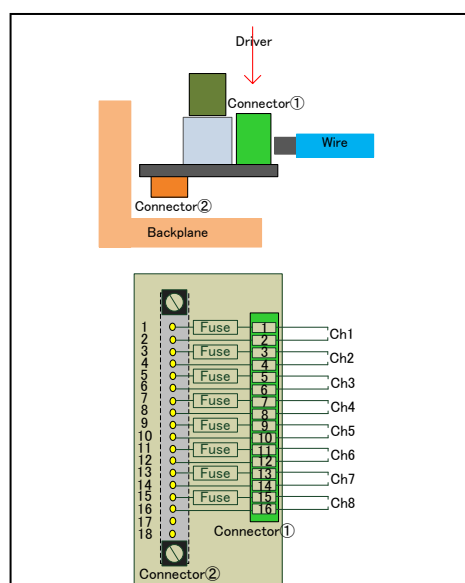

*In the case of an order, please appoint fuse capacity.

The choice is possible as following.


Fuse form	Rated Current(A)
MP032	0.32
MP05	0.50
MP063	0.63
MP10	1.00
MP16	1.60
MP20	2.00
MP32	3.20
MP50	5.00
MP63	6.30
MP75	7.50
MP_Short_Plug	Disconnection parts

When using, please read the instruction manual attached to the product carefully and use it properly. This catalog may not be distributed or reproduced in whole or in part without permission. Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product. The service names and product names of other companies described in this catalog are the trademarks of each company.

LSACT09-L IO backplane connector

Screw type, 0.25 to 2.5mm², Screw latch, 8 point fuse type, 16 pins

Summary

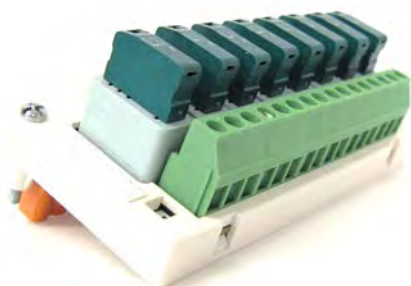


* Wire holding structure	: Screw type
* Wire size(ferrule)	: 0.25 to 2.5mm ²
* Connector rock method	: Screw latch
* Number of pins	: 16

Specifications

ITEM		SPECIFICATION
Classification		8 point fuse
Attachment position		IO backplane terminal(Left side)
Number of pins		16 (1 row)
Pitch		5.08mm
Wire holding structure		Screw type
Screw size		M3
Tightening torque		Minimum 0.5Nm, Maximum 0.6Nm
Rated voltage(IEC)		400VAC
Rated current(IEC)		3A
Dielectric strength		2300VAC (Between neighbor pins)
Wire size		Wire end ferrule with isolation cover 0.25 to 2.5mm ² (AWG23 to AWG14) Flexible 0.2 to 2.5mm ² (AWG24 to AWG14)
Stripping length		8mm
Protection		Safe from finger touch
Flamability class UL94		V-0
Compatible terminal bases		LSIOB01, LSIOB02
Environmental conditions	Ambient temperature	(Operating) Less than 5A : -5 to 60°C, (Storage) -25 to 55°C More than 6.3A : -5 to 50°C
	Ambient humidity	(Operating) Not specified (Storage) Less than 80%RH (No condensation)
Weight		0.12kg
Dimensions		49.0mmD x 46.5mmH x 102.0mmW (Except projection)

*About compliant module type

For compliant modules of this product, please refer to “Compliant accessory connector list (CGS-S9902-E-XX)”.

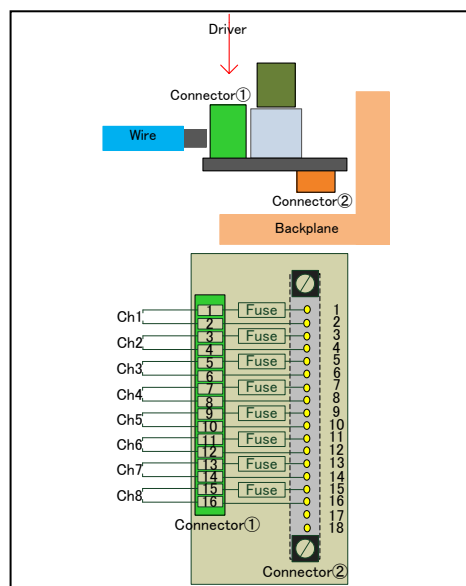

*In the case of an order, please appoint fuse capacity.

The choice is possible as following.

Fuse form	Rated Current(A)
MP032	0.32
MP05	0.50
MP063	0.63
MP10	1.00
MP16	1.60
MP20	2.00
MP32	3.20
MP50	5.00
MP63	6.30
MP75	7.50
MP_Short_Plug	Disconnection parts

When using, please read the instruction manual attached to the product carefully and use it properly. This catalog may not be distributed or reproduced in whole or in part without permission. Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product. The service names and product names of other companies described in this catalog are the trademarks of each company.