


LSACT10-R IO backplane connector

Screw type, 0.25 to 2.5mm², Screw latch, 32pins

Summary

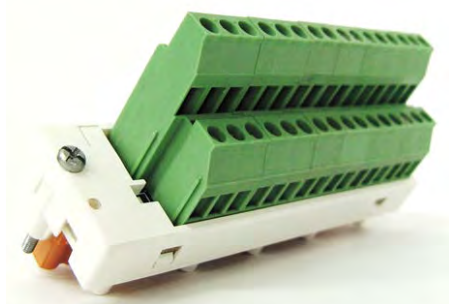


- * Wire holding structure : Screw type
- * Wire size(ferrule) : 0.25 to 2.5mm²
- * Connector rock method : Screw latch
- * Number of pins : 32

Specifications

ITEM		SPECIFICATION	
Classification		32pins type	
Attachment position		IO backplane terminal(Right side)	
Number of pins		32 (2 rows, 16 pins/row)	
Pitch		5.08mm	
Wire holding structure		Screw type	
Screw size		M3	
Tightening torque		Minimum 0.5Nm, Maximum 0.6Nm	
Rated voltage(IEC)		400V	
Rated current(IEC)		3A	
Dielectric strength		2300VAC (Between neighbor pins)	
Wire size		Wire end ferrule with isolation 0.25 to 2.5mm ² (AWG23 to AWG14)	
		Flexible 0.2 to 2.5mm ² (AWG24 to AWG14)	
Stripping length		7mm	
Protection		Safe from finger touch	
Flamability class UL94		V-0	
Compatible terminal bases		LSIOB01, LSIOB02	
Environmental conditions	Ambient temperature	(Operating) -5 to 60°C	(Storage) -25 to 55°C
	Ambient humidity	(Operating) Not specified	(Storage) Less than 80%RH (No condensation)
Weight		0.12kg	
Dimensions		27.1mmD x 53.4mmH x 102.0mmW (Except projection)	

*About compliant module type

For compliant modules of this product, please refer to "Compliant accessory connector list (CGS-S9902-E-XX)".

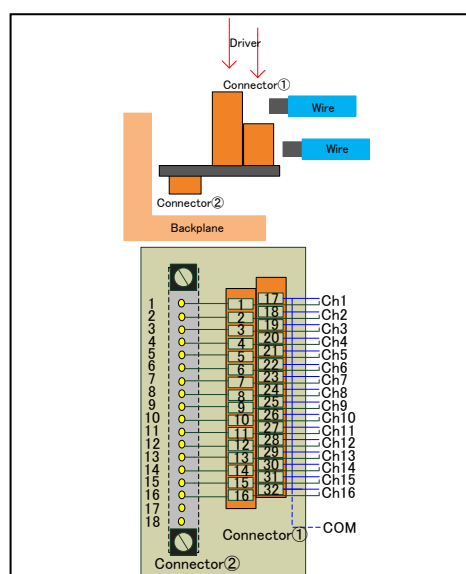


When using, please read the instruction manual attached to the product carefully and use it properly.
This catalog may not be distributed or reproduced in whole or in part without permission.
Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.
The service names and product names of other companies described in this catalog are the trademarks of each company.

LSACT10-L IO backplane connector

Screw type, 0.25 to 2.5mm², Screw latch, 32pins

Summary

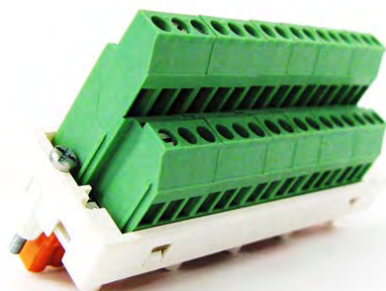


- * Wire holding structure : Screw type
- * Wire size(ferrule) : 0.25 to 2.5mm²
- * Connector rock method : Screw latch
- * Number of pins : 32

Specifications

ITEM	SPECIFICATION
Classification	32pins type
Attachment position	IO backplane terminal(Left side)
Number of pins	32 (2 rows, 16pins/row)
Pitch	5.08mm
Wire holding structure	Screw type
Screw size	M3
Tightening torque	Minimum 0.5Nm, Maximum 0.6Nm
Rated voltage(IEC)	400V
Rated current(IEC)	3A
Dielectric strength	2300VAC (Between neighbor pins)
Wire size	Wire end ferrule with isolation 0.25 to 2.5mm ² (AWG23 to AWG14) Flexible 0.2 to 2.5mm ² (AWG24 to AWG14)
Stripping length	7mm
Protection	Safe from finger touch
Flamability class UL94	V-0
Compatible terminal bases	LSIOB01, LSIOB02
Environmental conditions	Ambient temperature (Operating) -5 to 60°C (Storage) -25 to 55°C
	Ambient humidity (Operating) Not specified (Storage) Less than 80%RH (No condensation)
Weight	0.12kg
Dimensions	27.1mmD x 53.4mmH x 102.0mmW (Except projection)

*About compliant module type

For compliant modules of this product, please refer to “Compliant accessory connector list (CGS-S9902-E-XX)”.

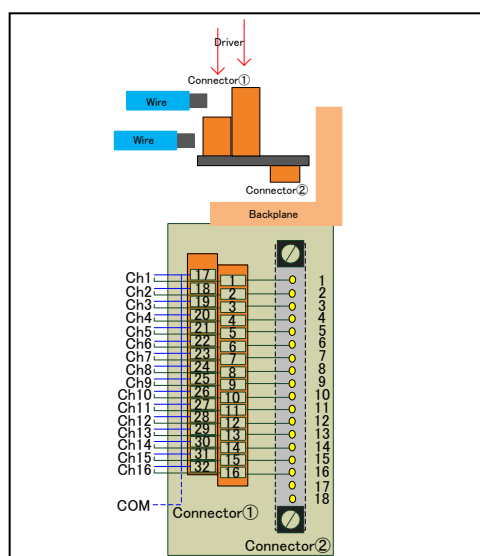

When using, please read the instruction manual attached to the product carefully and use it properly. This catalog may not be distributed or reproduced in whole or in part without permission. Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product. The service names and product names of other companies described in this catalog are the trademarks of each company.