


LSACT21-R IO backplane connector

Spring type (Push IN) , 0.25 to 2.5mm², Screw latch, 18pin One disconnection type

Summary

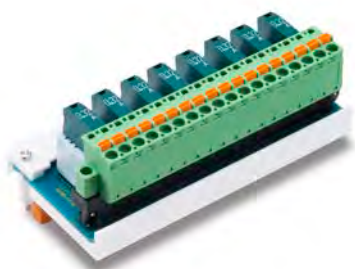


- * Wire holding structure : Spring type (Push IN)
- * Wire size(Ferrule) : 0.25 to 2.5mm²
- * Connector rock method : Screw latch
- * Number of pins : 18pin

Specifications

| ITEM | | SPECIFICATION |
|---------------------------|---------------------|--|
| Classification | | 18pin One disconnection type |
| Attachment position | | IO backplane terminal (Right side) |
| Number of pins | | 18pins (18pins/1rows) |
| Pitch | | 5.08mm |
| Wire holding structure | | Spring type (Push IN) |
| Rated voltage(IEC) | | 320V |
| Rated current(IEC) | | 3A |
| Rated dielectric strength | | 500VAC(Between neighbor pins) |
| Wire size | | Wire end ferrule with isolation cover 0.25 to 2.5mm ² (AWG24 to AWG14) Flexible 0.2 to 2.5mm ² (AWG24 to AWG14) |
| Wire peeling length | | 10mm |
| Protection | | Safe from finger touch |
| Flamability class UL94 | | V-0 |
| Compatible terminal bases | | LSIOB01 |
| Environmental conditions | Ambient temperature | (Operating) -5 to 60°C (Storage) -25 to 55°C |
| | Ambient humidity | (Operating) Less than 95%RH (No condensation) (Storage) Less than 80%RH (No condensation) |
| Weight | | 0.13kg |
| Dimensions | | 50.0mmD x 52.0mmH x 102.0mmW (Except projection) |

*About compliant module type

For compliant modules of this product, please refer to " Compliant accessory connector list (CGS-S9902-E-XX) ".

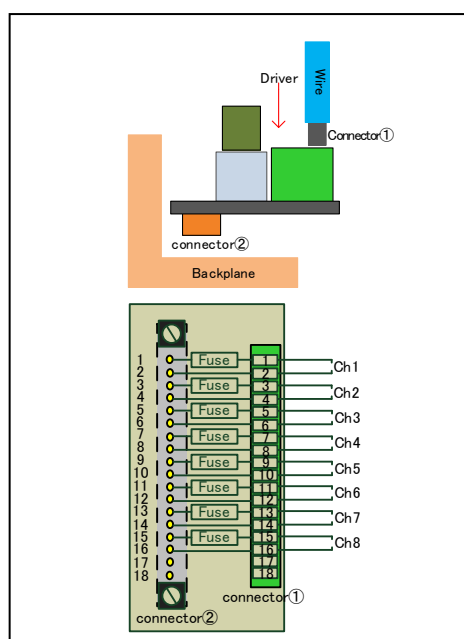

*In the case of an order, please appoint fuse capacity.

The choice is possible as following.

| Fuse form | Rated Current(A) |
|---------------|-----------------------|
| MP032 | 0.32 |
| MP05 | 0.50 |
| MP063 | 0.63 |
| MP10 | 1.00 |
| MP16 | 1.60 |
| MP20 | 2.00 |
| MP_Short_Plug | (Disconnection parts) |

When using, please read the instruction manual attached to the product carefully and use it properly. This catalog may not be distributed or reproduced in whole or in part without permission. Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product. The service names and product names of other companies described in this catalog are the trademarks of each company.

LSACT21-L IO backplane connector

Spring type (Push IN) , 0.25 to 2.5mm², Screw latch, 18pin One disconnection type

Summary




- * Wire holding structure : Spring type (Push IN)
- * Wire size(Ferrule) : 0.25 to 2.5mm²
- * Connector rock method : Screw latch
- * Number of pins : 18pin

Specifications

| ITEM | | SPECIFICATION |
|---------------------------|---------------------|--|
| Classification | | 18pin One disconnection type |
| Attachment position | | IO backplane terminal (Left side) |
| Number of pins | | 18pins (18pins/1rows) |
| Pitch | | 5.08mm |
| Wire holding structure | | Spring type (Push IN) |
| Rated voltage(IEC) | | 320V |
| Rated current(IEC) | | 3A |
| Rated dielectric strength | | 500VAC(Between neighbor pins) |
| Wire size | | Wire end ferrule with isolation cover 0.25 to 2.5mm ² (AWG24 to AWG14) Flexible 0.2 to 2.5mm ² (AWG24 to AWG14) |
| Wire peeling length | | 10mm |
| Protection | | Safe from finger touch |
| Flamability class UL94 | | V-0 |
| Compatible terminal bases | | LSIOB01 |
| Environmental conditions | Ambient temperature | (Operating) -5 to 60°C (Storage) -25 to 55°C |
| | Ambient humidity | (Operating) Less than 95%RH (No condensation) (Storage) Less than 80%RH (No condensation) |
| Weight | | 0.13kg |
| Dimensions | | 50.0mmD x 52.0mmH x 102.0mmW (Except projection) |

*About compliant module type

For compliant modules of this product, please refer to “ Compliant accessory connector list (CGS-S9902-E-XX) ”.

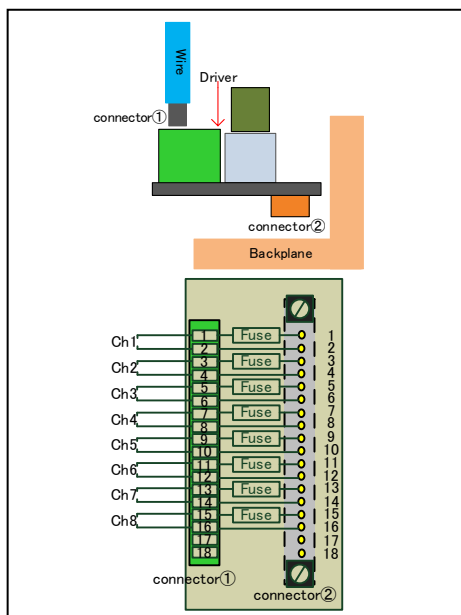

*In the case of an order, please appoint fuse capacity.

The choice is possible as following.

| Fuse form | Rated Current(A) |
|---------------|-----------------------|
| MP032 | 0.32 |
| MP05 | 0.50 |
| MP063 | 0.63 |
| MP10 | 1.00 |
| MP16 | 1.60 |
| MP20 | 2.00 |
| MP_Short_Plug | (Disconnection parts) |

When using, please read the instruction manual attached to the product carefully and use it properly.
This catalog may not be distributed or reproduced in whole or in part without permission.
Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.
The service names and product names of other companies described in this catalog are the trademarks of each company.