


LSACT23A-R IO backplane connector

Screw type, 0.2 to 2.5mm², Screw latch, 18pin type 3 wire RTD input (4) only

Summary

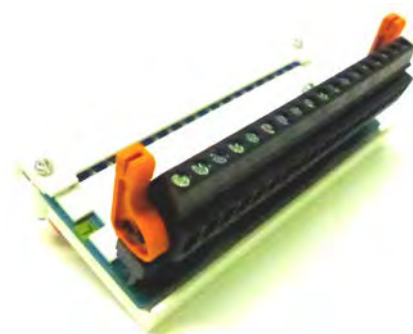


- * Wire holding structure : Screw type
- * Wire size(Ferrule) : 0.2 to 2.5mm²
- * Connector rock method : Screw latch
- * Number of pins : 18pin
- * 3 wire RTD input(4)only

Specifications

ITEM		SPECIFICATION	
Classification		18pins type	
Attachment position		IO backplane terminal (Right side)	
Number of pins		18pins (18pins/1rows)	
Pitch		5.08mm	
Wire holding structure		Screw type	
Screw size		M2.5	
Tightening torque		Minimum 0.4Nm , Maximum 0.5Nm	
Rated voltage(IEC)		320V	
Rated current(IEC)		3A	
Rated dielectric strength		500VAC (Between neighbor pins)	
Wire size		Wire end ferrule with isolation cover 0.2 to 2.5mm ² (AWG24 to AWG14) Flexible 0.2 to 4.0mm ² (AWG24 to AWG12)	
Wire peeling length		7mm	
Protection		Safe from finger touch	
Flamability class UL94		V-0	
Compatible terminal bases		LSIOB01	
Environmental conditions	Ambient temperature	(Operating) -5 to 60°C	(Storage) -25 to 55°C
	Ambient humidity	(Operating) Less than 95%RH (No condensation)	(Storage) Less than 80%RH (No condensation)
Weight		0.10kg	
Dimensions		50.0mmD x 54.0mmH x102.0mmW (Except projection)	

*About compliant module type

For compliant modules of this product, please refer to " Compliant accessory connector list (CGS-S9902-E-XX) ".

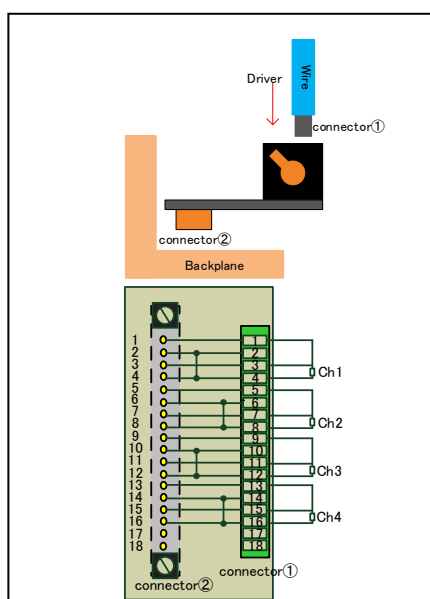


When using, please read the instruction manual attached to the product carefully and use it properly.
This catalog may not be distributed or reproduced in whole or in part without permission.
Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.
The service names and product names of other companies described in this catalog are the trademarks of each company.

LSACT23A-L IO backplane connector

Screw type, 0.2 to 2.5mm², Screw latch, 18pin type 3 wire RTD input (4) only

Summary

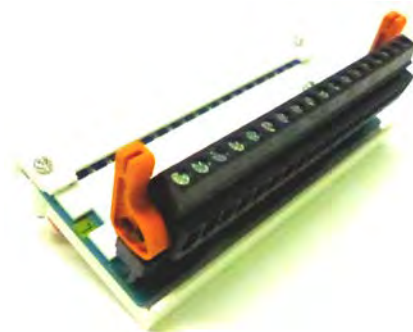


- * Wire holding structure : Screw type
- * Wire size(Ferrule) : 0.2 to 2.5mm²
- * Connector rock method : Screw latch
- * Number of pins : 18pin
- * 3 wire RTD input(4)only

Specifications

ITEM		SPECIFICATION
Classification		18pin type
Attachment position		IO backplane terminal (Left side)
Number of pins		18pins (18pins/1rows)
Pitch		5.08mm
Wire holding structure		Screw type
Screw size		M2.5
Tightening torque		Minimum 0.4Nm , Maximum 0.5Nm
Rated voltage(IEC)		320V
Rated current(IEC)		3A
Rated dielectric strength		500VAC (Between neighbor pins)
Wire size		Wire end ferrule with isolation cover 0.2 to 2.5mm ² (AWG24 to AWG14) Flexible 0.2 to 4.0mm ² (AWG24 to AWG12)
Wire peeling length		7mm
Protection		Safe from finger touch
Flamability class UL94		V-0
Compatible terminal bases		LSIOB01
Environmental conditions	Ambient temperature	(Operating) -5 to 60°C (Storage) -25 to 55°C
	Ambient humidity	(Operating) Less than 95%RH (No condensation) (Storage) Less than 80%RH (No condensation)
Weight		0.10kg
Dimensions		50.0mmD x 54.0mmH x 102.0mmW (Except projection)

*About compliant module type

For compliant modules of this product, please refer to " Compliant accessory connector list (CGS-S9902-E-XX) ".

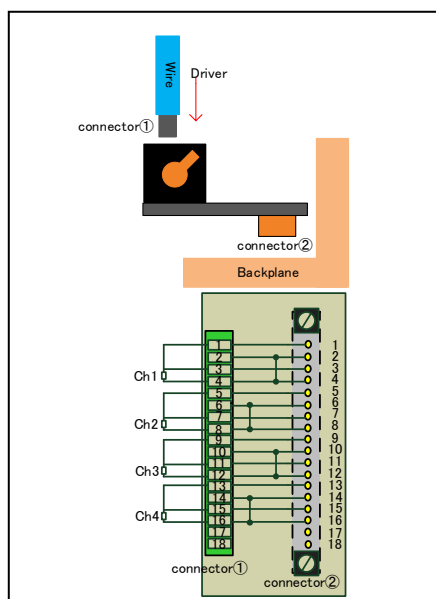

When using, please read the instruction manual attached to the product carefully and use it properly.
This catalog may not be distributed or reproduced in whole or in part without permission.
Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.
The service names and product names of other companies described in this catalog are the trademarks of each company.