


LSACT24 IO backplane connector

Spring type (Push IN) , 0.25 to 2.5mm², Screw latch, 18pin type

Summary

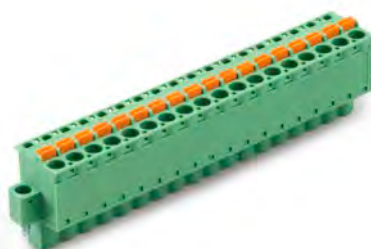



- * Wire holding structure : Spring type (Push IN)
- * Wire size(Ferrule) : 0.25 to 2.5mm²
- * Connector rock method : Screw latch
- * Number of pins : 18pin

Specifications

ITEM		SPECIFICATION
Classification		18pins type
Number of pins		18pins (18pins/1rows)
Pitch		5.08mm
Wire holding structure		Spring type (Push IN)
Rated voltage(IEC)		320V
Rated current(IEC)		12A@20°C
Rated dielectric strength		2.21kVAC(Between neighbor pins)
Wire size		Wire end ferrule with isolation cover 0.25 to 2.5mm ² (AWG24 to AWG14) Flexible 0.2 to 2.5mm ² (AWG24 to AWG14)
Wire peeling length		10mm
Protection		Safe from finger touch
Flamability class UL94		V-0
Compatible terminal bases		LSIOB01, LSIOB02, LSIOB03
Environmental conditions	Ambient temperature	(Operating) -5 to 85°C (Storage) -40 to 70°C
	Ambient humidity	Less than 95%RH (No condensation)
Weight		0.03kg
Dimensions		25.2mmD x 15.0mmH x 101.5mmW (Except projection)

*About compliant module type

For compliant modules of this product, please refer to "Compliant accessory connector list (CGS-S9902-E-XX)".

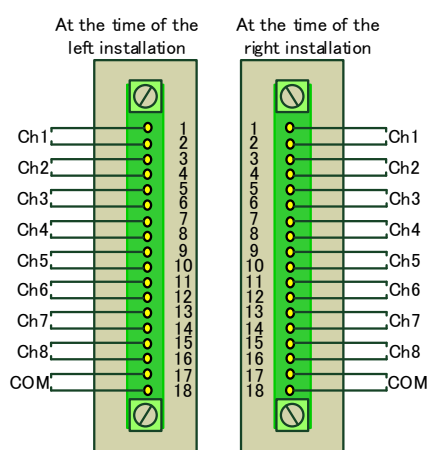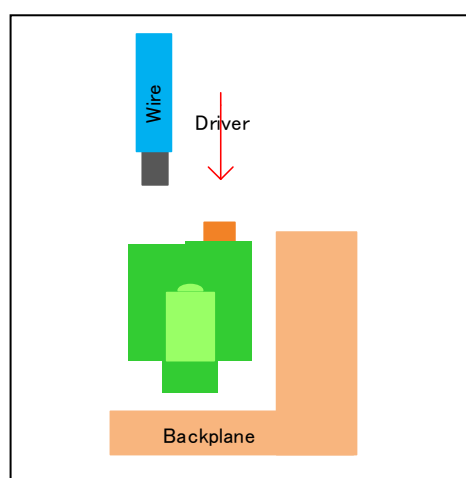

When using, please read the instruction manual attached to the product carefully and use it properly.

This catalog may not be distributed or reproduced in whole or in part without permission.

Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.

The service names and product names of other companies described in this catalog are the trademarks of each company.