

LSDOM03-1 DO module

LS communication Digital outputs : 16

■ Summary



- * Number of outputs : 16 (16 ch common isolation)
- * Contact : Dry / A contact (Normally Open)
- * Contact method : FET(Field effect transistor) output (Minus common)
- * Module operating ambient temperature : -5 to 60°C
- * Insulation method : Transformer insulation

LSDOM03-1 DO module

LS communication Digital outputs : 16

■ Specifications

ITEM		SPECIFICATION
Output	Number of channels	16 (16 ch common isolation)
	Contact	Dry / A contact (Normally Open)
	Contact method	FET (Field effect transistor) output (minus common)
	Contact on voltage	3 V or less
	Max rating contact voltage	DC 250 V
	Max contact current	Continuous 75 mA
	Data refresh cycle	ON → OFF : 1 ms or less OFF → ON : 1 ms or less
Dielectric strength		AC 1500 V between output terminal and PE
Communication with IOA	Communication method	LVDS
	Communication speed	100 Mbps
Self-diagnostic functions		Power voltage check (24V, 3.3V, 2.5V, 1.8V, 1.0V) Clock check (FPGA-MCU for diagnosis, MCU for diagnosis -FPGA) Heartbeat check (FPGA-MCU for diagnosis, MCU for diagnosis -FPGA) CRC check (FPGA)
Protection	(Power supply Protection)	Overvoltage protection Overcurrent protection
Indicator	Display LED	4: RUN(Run) / STS(Status) / NSA(Network status A) / NSB(Network status B)
	Channel State LED	16: Ch 1 to Ch 16
Insulation method		Transformer insulation
Hot swap		Possible
Power supply		DC 24 V ±20% (The voltage supplied from the backplane)
Environmental conditions	Module ambient temperature	(Operating) -5 to 60°C (Storage) -40 to 85°C
	Module ambient humidity	(Operating / Storage) 10 to 95% RH (No condensation)
Vibration		3.5 mm @5 to 8.4 Hz 1 G @8.4 to 150 Hz
Shock		15 G 11 ms
Rated Current		108 mA
Weight		0.10 kg
Dimensions		62 mm (D) x 94 mm (H) x 46 mm (W) (Except projection)
Standard/Directive		EN 61131-2:2007, RoHS

About compliant module type



For compliant modules of this product, please refer to "Compliant backplane list (CGS-S9901-E-XX)".

For compliant modules of this product, please refer to "Compliant accessory connector list (CGS-S9902-E-XX)".

LSDOM03-1 DO module

LS communication Digital outputs : 16

■ Block diagram

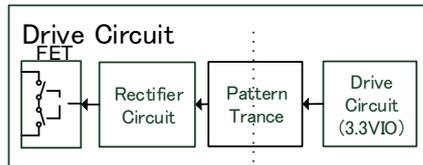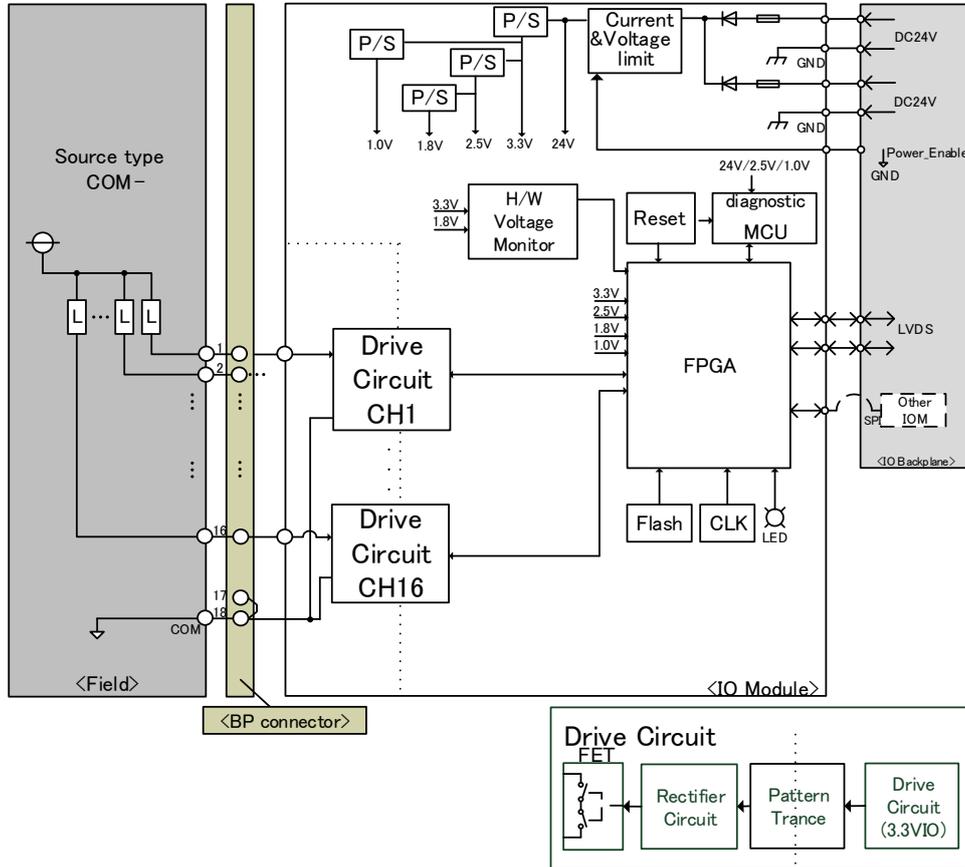

- | | | |
|-------------------------------------------------------------------------------------|---|------------------------------------|
| P/S | : | Power supply |
| COM | : | Common |
| CLK | : | Clock |
| FET | : | Field effect transistor |
| FPGA | : | Field programmable gate array |
| LED | : | Light emitting diode |
| MCU | : | Micro control unit |
| GND | : | Ground |
| IOM | : | I/O module |
| IOA | : | I/O adapter |
| LVDS | : | Low Voltage Differential Signaling |
| BP | : | Backplane |
| P/C | : | Photocoupler |
|  | : | Fuse |
|  | : | Diode |
|  | : | Power supply |
|  | : | Load |

When using, please read the instruction manual attached to the product carefully and use it properly.

This catalog may not be distributed or reproduced in whole or in part without permission.

Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.

DIASYS Netmation/DIASYS Netmation4S is a registered trademark of Mitsubishi Heavy Industries, Ltd.

The service names and product names of other companies described in this catalog are the trademarks or registered trademarks of each company.