

# LSSVT11 Servo valve interface module

LS communication Transmitter Servo valve interface Valve position demand output ( $\pm 20$  mA/60 mA)

## ■ Summary



### \* Terminal block input / output unit

- 52 G ON Digital input : 1
- External forced closed input : 1
- Valve position demand output : 1  
01 type :  $\pm 20$  mA  
02 type :  $\pm 60$  mA
- Valve position feedback input : 1  
Distributor input

### \* Auxiliary output connector

- Analog output : 3

### \* USB connector : 1 (For maintenance communication mini-B)

### \* Module operating ambient temperature range: -5 to 60°C

## ■ Overview Specifications

ITEM	SPECIFICATION
52 G ON Digital input	DC 24 V $\times$ 1, minimum ON Current 2 mA
External forced closed input	DC 24 V $\times$ 1, minimum ON Current 2 mA
Valve position demand output	$\pm 20$ mA / $\pm 60$ mA $\times$ 1
Valve position feedback input	Distributor input $\times$ 1, 4 to 20 mA
Analog output(Auxiliary output connector)	1 to 5 V DC $\times$ 3
Self-diagnostic functions	Power voltage check, Clock abnormal check, Heartbeat check , CRC check, ADC communication error check, I/O signal range check
IDOL Implementation	Possible
Module Duplication	Supported (backplane uses LSI0B02 or LSI0B03) However, the signal of the auxiliary output connector does not support duplication
Indicator	Display LED $\times$ 4: Run / Status / Network status A / Network status B General purpose display LED $\times$ 16: Ch 1 to Ch 16 It can be arbitrarily set with internal logic
USB connector	1 (For maintenance communication mini-B)
Dielectric strength	AC 2000 V Digital input / output terminal - FG Between AC 1000 V Analog input / output terminal - FG Between
Environmental conditions	Ambient temperature (Operating / Storage) -5 to 60°C Ambient humidity (Operating / Storage) 0 to 95% RH (No condensation)
Operating power supply	DC 24 V $\pm 20\%$ Dual power reception (The voltage supplied from the backplane)
Shock / Vibration	15 G 11 ms / 3.5 mm @5 to 8.4 Hz, 1 G @8.4 to 150 Hz
Dimensions	152.5 mm (D) x 94 mm (H) x 46 mm (W) (Except projection)

# LSSVT11 Servo valve interface module

LS communication Transmitter Servo valve interface Valve position demand output ( $\pm 20$  mA/60 mA)

## Details Specifications

ITEM		SPECIFICATION			
Terminal block Input/output unit	Ch 1: 52G ON Digital input	Number of channels		1	
		Insulation method		Photocoupler insulation	
		Dielectric strength		AC 2000 V	
		Current range	ON current	DC 2 mA or more Sense supply voltage:DC 24 V $\pm 10\%$	
	OFF current		DC 1 mA or less		
	Ch 2: External forced closed input	Number of channels		1	
		Insulation method		Photocoupler insulation	
		Dielectric strength		AC 2000 V	
		Current range	ON current	DC 2 mA or more Sense supply voltage:DC 24 V $\pm 10\%$	
	OFF current		DC 1 mA or less		
	Ch 3,Ch 4: Valve position demand output  *The type of O1/O2 is switched by EMS	Number of channels		1	
		Insulation method		Digital isolator insulation	
		Dielectric strength		AC 1000 V	
		Rated output current		O1 type	-20 to +20 mA (full scale)
				O2 type	-60 to +60 mA (full scale)
		Rated load resistance		O1 type	250 $\Omega$
				O2 type	40 $\Omega$
		Load resistance range		O1 type	40 to 400 $\Omega$
				O2 type	10 to 160 $\Omega$
		Absolute precision	@25°C	O1 type	$\pm 0.1\%$ FS ( $\pm 0.04$ mA) @Calibration load (Factory shipped: 250 $\Omega$ )
				O2 type	$\pm 0.1\%$ FS ( $\pm 0.12$ mA) @Calibration load (Factory shipped: 40 $\Omega$ )
Temperature drift		@-5 to 60°C	O1 type	$\pm 100$ ppm/°C (Against full scale)	
			O2 type		
Output current monitor		Built-in			
Absolute precision	@25°C	O1 type	$\pm 0.3\%$ FS ( $\pm 0.12$ mA) @Calibration load		
		O2 type	$\pm 0.3\%$ FS ( $\pm 0.36$ mA) @Calibration load		
Temperature drift	@-5 to 60°C	O1 type	$\pm 200$ ppm/°C (Against full scale)		
		O2 type			
Ch 5: Valve position feedback input (Distributor input)	Number of channels		1		
	Insulation method		Transformer insulation		
	Dielectric strength		AC 1000 V		
	Input current range		4 to 20 mA (full scale)		
	Output voltage		14.5 to 28 V (4 to 20 mA)		
	Absolute precision	@25°C	$\pm 0.15\%$ FSD ( $\pm 0.016$ mA)		
	Temperature drift	@-5 to 60°C	$\pm 100$ ppm/°C (Against full scale)		
Auxiliary output connector	Number of channels		3		
	Insulation method		Digital isolator insulation		
	Dielectric strength		AC 500 V		
	Rated output voltage		1 to 5 V (full scale)		
	Minimum load resistance		2 k $\Omega$		
	Absolute precision	@25°C	$\pm 0.3\%$ FS ( $\pm 0.12$ mV)		
	Temperature drift	@-5 to 60°C	$\pm 200$ ppm/°C (Against full scale)		
Calculation cycle usable in DPS		10 msec or more			
Communication specification between IOA	Communication method,		LVDS, 100 Mbps		
	Communication speed				
Self-diagnostic functions		Power voltage check (24 V, 17 V, 3.3 V, 1.2 V, Other) *Refer to block diagram Clock abnormal check (FPGA-MCU, FPGA-CPU) Heartbeat check (FPGA-MCU, FPGA-CPU) CRC check (FPGA-MCU) ADC communication error check I/O signal range check (Analog input channel: Overrange, Underrange)			

# LSSVT11 Servo valve interface module

LS communication Transmitter Servo valve interface Valve position demand output ( $\pm 20$  mA/60 mA)

ITEM		SPECIFICATION
IDOL Implementation		Possible Supplement: IDOL is the logic description language used in DIASYS-UP, DIASYS-UP/V. The internal logic of this module is described in IDOL.
Module Duplication		Supported (backplane uses LSIOB02 or LSIOB03) However, the signal of the auxiliary output connector does not support duplication
Protective function (Backplane supply power protection)		Overvoltage protection , Overcurrent protection
Indicator	Display LED	4: RUN (Run)/STS (Status)/NSA (Network status A)/NSB (Network status B)
	General purpose display LED	16: Ch 1 to Ch 16 Arbitrarily set by internal logic
Serial interface	For maintenance	1: USB Serial (USB mini-B connector)
Hot swap		Possible
Operating power supply		DC 24 V $\pm 20\%$ Dual power reception (The voltage supplied from the backplane)
Environmental conditions	Module ambient temperature	(Operating / Storage) -5 to 60°C
	Module ambient humidity	(Operating / Storage) 0 to 95% RH (No condensation)
Vibration		3.5 mm @5 to 8.4 Hz 1 G @8.4 to 150 Hz
Shock		15 G 11 ms
Current consumption		240 mA or less
Weight		0.20 kg
Dimensions		152.5 mm (D) x 94 mm (H) x 46 mm (W) (Except projection)
Standard/Directive		IEC61131-2:2007, RoHS

\*About compliant module type


For compliant modules of this product, please refer to "Compliant backplane list (CGS-S9901-E-XX)".

For compliant modules of this product, please refer to "Compliant accessory connector list (CGS-S9902-E-XX)".

# LSSVT11 Servo valve interface module

LS communication Transmitter Servo valve interface Valve position demand output ( $\pm 20$  mA/60 mA)

## Block diagram

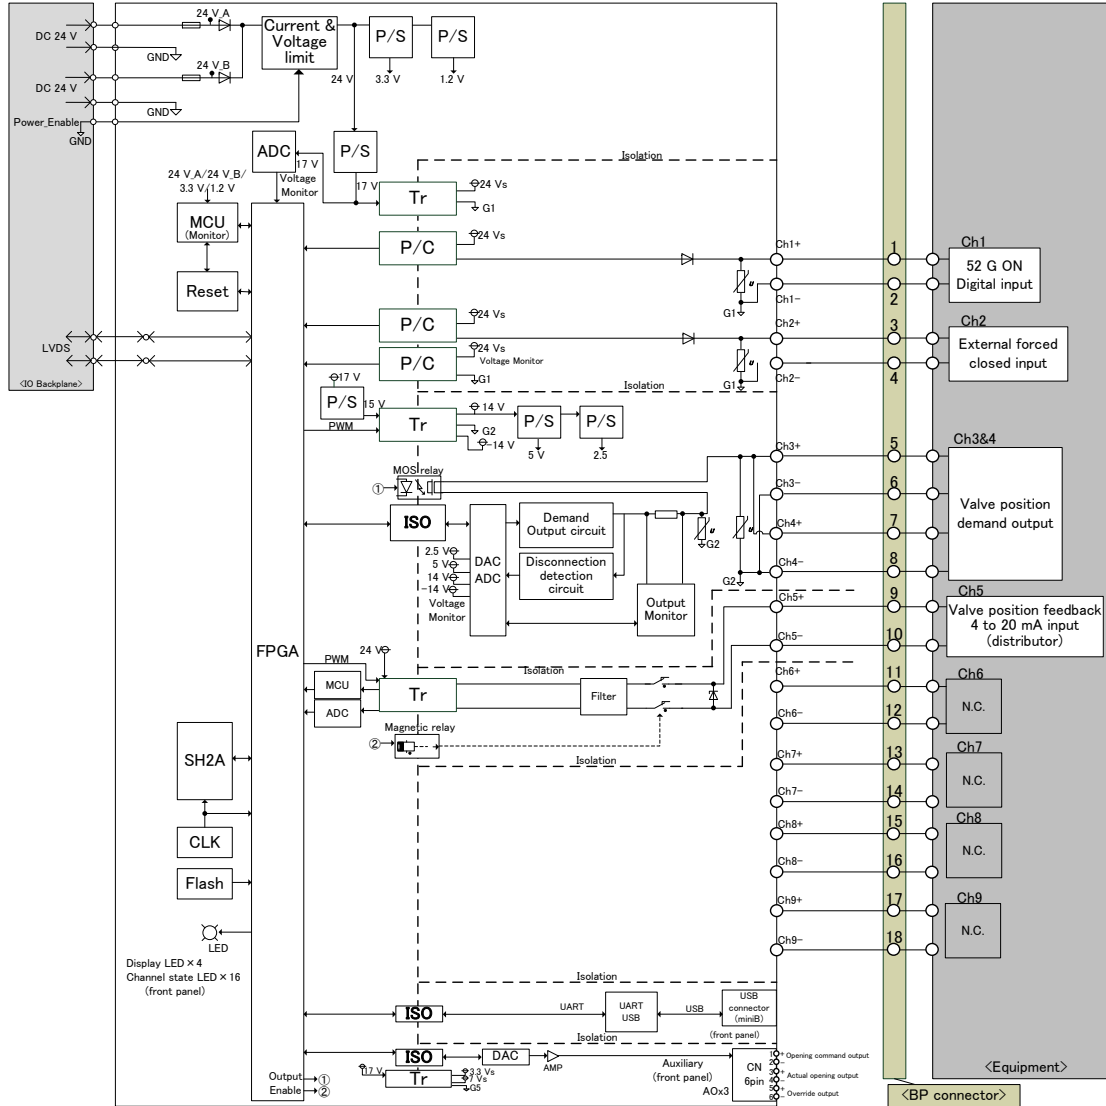

P/S	: Power supply	MCU	: Micro control unit
SH2A	: Renesas SH-2A micro processor	FPGA	: Field programmable gate array
CLK	: Clock generation circuit	LED	: Light emitting diode
ISO	: Digital isolator	ADC	: Analog digital converter
LPF	: Low pass filter	GND,G1,G2,G4	: Ground
LVDS	: Low Voltage Differential Signaling	BP	: Backplane
PWM	: Pulse width modulation	DAC	: Digital analog converter
AMP	: Amplifier	$\nabla$	: Zener diode
P/C	: Photo Coupler	Tr	: Transformer
N.C	: No Connection	CN	: Connector
AO	: Analog Output	Flash	: Flash ROM
$\nabla$	: Varistor	Resistor	: Resistor
$\square$	: Fuse	Diode	: Diode

When using, please read the instruction manual attached to the product carefully and use it properly.

This catalog may not be distributed or reproduced in whole or in part without permission.

Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.

DIASYS Netmation/DIASYS Netmation4S is a registered trademark of Mitsubishi Heavy Industries, Ltd.

The service names and product names of other companies described in this catalog are the trademarks or registered trademarks of each company.