


# LSIOB01-4 I/O module backplane

For single Supports 4 modules

## ■ Summary

---

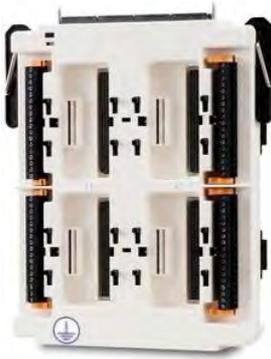

\* I/O module backplane : Supports 4 modules

\* Power supply : DC 24 V (Supply from LSADB01 backplane)

# LSIOB01-4 I/O module backplane

For single Supports 4 modules

## ■ Specifications

ITEM		SPECIFICATION
Power supply	Power supply	DC 24 V $\pm$ 20% (Supply from LSADB01 backplane)
	Input method	Power receive of the independent 2 lines
Backplane connector (Field I/O connector parts)	Number of connectors	4
	Power supply	400 V DC
	Rated current	3 A
I/O module contact connector	Number of connectors	4
Dielectric strength		Between terminal block - SELV 24 V power supplies: DC 3250 V 60 sec Between terminal block - PE: DC 3250 V 60 sec
Environmental conditions	Module ambient Temperature	(Operating) -5 to 60°C (Storage) -40 to 85°C
	Module ambient humidity	(Operating / Storage) 95% RH or less (No condensation)
Vibration		3.5 mm @5 to 8.4 Hz 1 G @8.4 to 150 Hz
Shock		15 G 11 ms
Indicator		Single/Redundant key
Rated Current		1.0 mA
Weight		1.0 kg
Dimensions		42.5 mm (D) x 264.4 mm (H) x 228.4 mm (W) (Except projection)
Standard/Directive		EN 61131-2, RoHS

About compliant module type

For compliant modules of this product, please refer to "Compliant backplane list (CGS-S9901-E-XX)".

Precaution:

IO backplane connection of each other, you and up to three-stage connection.

