

CPETH02 interface card

CompactPCI 10M/100M Ethernet interface card (2 ports)



■ Outline


- * 133Mbps CompactPCI bus
- * IEEE802.3 10BASE-T/100BASE-TX Specification standard

ITEM	SPECIFICATION
Controller	Intel 82559/25MHz ×2
Ethernet Interface	2 ・10Mbps/10BASE-T or ・100Mbps/100BASE-TX
Internal buffer data	3KB/ send data 3KB/ receive data
Connector	RJ45 ×2
User interface	LED×2 (Each port) ・ Link ・ Control
Bus standard	CompactPCI bus R2.1 PICMG2.0 R2.1 IEEE802.3
Environmental conditions	(Operating) Temperature: 0 ~ 55 °C Humidity: 35 ~ 95 % RH (No condensation) (Storage) Temperature: -10 ~ 70 °C Humidity: Less than 80 % RH (No condensation)
Power supply	DC 5V ±5% / typ 0.1 A DC 3.3V ±5% / typ 0.25 A
Dimensions	174 mmD×128 mmH×20 mmW (3U×1 Slot)

CPETH02 interface card

CompactPCI 10M/100M Ethernet interface card (2 ports)

CPETH02 block diagram

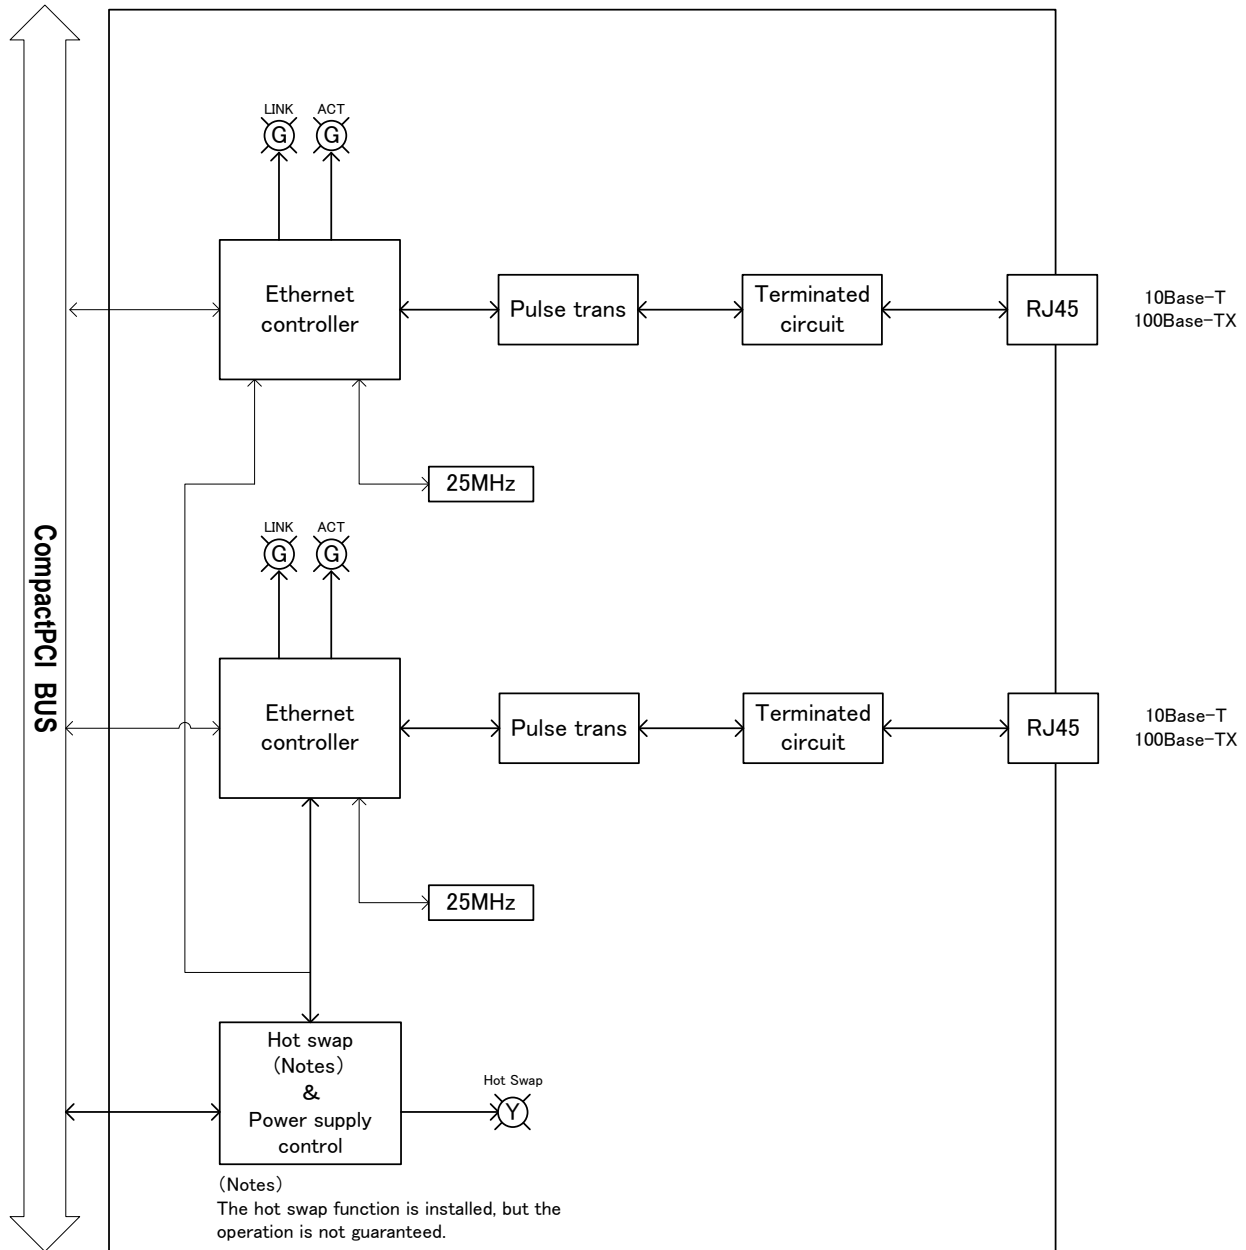

When using, please read the instruction manual attached to the product carefully and use it properly.

This catalog may not be distributed or reproduced in whole or in part without permission.

Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.

DIASYS Netmation/DIASYS Netmation4S is a registered trademark of Mitsubishi Power, Ltd.

The service names and product names of other companies described in this catalog are the trademarks or registered trademarks of each company.