

LSACT11-R Accessory connector

Connector type, D-sub, Screw latch, Dsub connector type, 37 pins

■ Summary



* Wire holding structure : Connector type

* Accessory connector lock : Screw Fixing
method

* Number of pins : 37

■ Specifications


ITEM		SPECIFICATION	
Classification		Dsub connector type	
Connection Type		-	
Attachment position on the IOM Backplane		Right side	
Tightening torque (to the IOM Backplane)		0.2 to 0.25 Nm (Recommendation)	
Number of pins		37	
Pitch		-	
Wire holding structure		Connector type	
Screw size		-	
Tightening torque		-	
Power supply (IEC)		300 V AC	
Rated current (IEC)		3 A	
Dielectric strength		1000 V AC (Between neighbor pins)	
Wire size		Solid/Flexible: 0.08 to 0.3 mm ² (AWG 28 to AWG 23)	
Stripping length		-	
Flamability class UL94		V-2	
Environmental conditions	Ambient temperature	(Operating) -5 to 60°C	(Storage) -20 to 70°C
	Ambient humidity	(Operating) 20 to 85% RH (No condensation)	(Storage) 20 to 85% RH (No condensation)
Weight		0.06 kg	
Dimensions		32.6 mm (D) x 34.3 mm (H) x 102.0 mm (W) (Except projection)	

About compliant module type:

For compliant modules of this product, please refer to "Compliant accessory connector list (CGS-S9902-E-XX)".

LSACT11-R Accessory connector

Connector type, D-sub, Screw latch, Dsub connector type, 37 pins

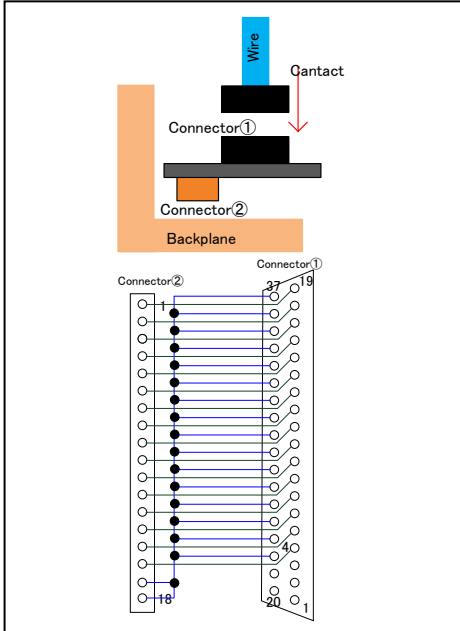

When using, please read the instruction manual attached to the product carefully and use it properly.

This catalog may not be distributed or reproduced in whole or in part without permission.

Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.

DIASYS Netmation/DIASYS Netmation4S is a registered trademark of Mitsubishi Heavy Industries, Ltd.

The service names and product names of other companies described in this catalog are the trademarks or registered trademarks of each company.

LSACT11-L Accessory connector

Connector type, D-sub, Screw latch, Dsub connector type, 37 pins

■ Summary



* Wire holding structure : Connector type

* Accessory connector lock : Screw Fixing
method

* Number of pins : 37

■ Specifications


ITEM		SPECIFICATION	
Classification		Dsub connector type	
Connection Type		-	
Attachment position on the IOM Backplane		Left side	
Tightening torque (to the IOM Backplane)		0.2 to 0.25 Nm (Recommendation)	
Number of pins		37	
Pitch		-	
Wire holding structure		Connector type	
Screw size		-	
Tightening torque		-	
Power supply (IEC)		300 V AC	
Rated current (IEC)		3 A	
Dielectric strength		1000 V AC (Between neighbor pins)	
Wire size		Solid/Flexible: 0.08 to 0.3 mm ² (AWG 28 to AWG 23)	
Stripping length		-	
Flamability class UL94		V-2	
Environmental conditions	Ambient temperature	(Operating) -5 to 60°C	(Storage) -20 to 70°C
	Ambient humidity	(Operating) 20 to 85% RH (No condensation)	(Storage) 20 to 85% RH (No condensation)
Weight		0.06 kg	
Dimensions		32.6 mm (D) x 34.3 mm (H) x 102.0 mm (W) (Except projection)	

About compliant module type:

For compliant modules of this product, please refer to "Compliant accessory connector list (CGS-S9902-E-XX)".

LSACT11-L Accessory connector

Connector type, D-sub, Screw latch, Dsub connector type, 37 pins

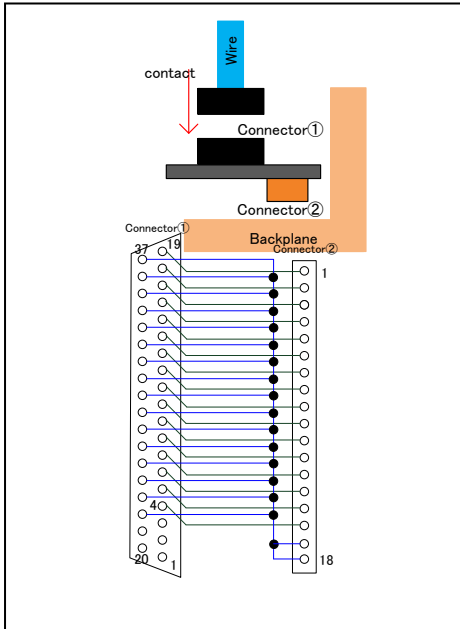

When using, please read the instruction manual attached to the product carefully and use it properly.

This catalog may not be distributed or reproduced in whole or in part without permission.

Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.

DIASYS Netmotion/DIASYS Netmotion4S is a registered trademark of Mitsubishi Heavy Industries, Ltd.

The service names and product names of other companies described in this catalog are the trademarks or registered trademarks of each company.