

LSIOB03-2 IO backplane module (IO No connection between terminals)

I/O module backplane (Installable 2 I/O modules)

■ Summary



- * I/O module backplane : Installable 2 I/O modules
- * Rated voltage : DC24V(Supply from LSADB01 backplane)
- * Characteristic : Redundant correspondence type
(No butt connection between the IO terminal connector)

LSIOB03-2 IO backplane module (IO No connection between terminals)

I/O module backplane (Installable 2 I/O modules)

Specifications


ITEM		SPECIFICATION
Power supply	Power supply	DC24V±20% (Supply from LSADB01 backplane)
	Input method	Power receive of the independent 2 lines , No butt connection between the IO terminal connector
Backplane connector (Field I/O connector parts)	Number of connectors	2
	Power supply	400VDC
	Rated current	3A
I/O module contact connector	Number of connectors	2
Dielectric strength		Between terminal block - SELV24V power supplies : DC3250V 60sec Between terminal block - PE : DC3250V 60sec
Environmental conditions	Module ambient Temperature	(Operating) -5 to 60° C (Storage) -40 to 85° C
	Module ambient humidity	Less than 95%RH (No condensation)
Vibration		3.5mm @5 to 8.4Hz 1G @8.4 to 150Hz
Shock		15G 11ms
Indicator		Single/Redundant key
Weight		0.7kg
Dimensions		228.4mmW x 159.4mmH x 42.5mmD (Except projection)
Standard/Directive		IEC61131-2、RoHS

*About compliant module type

For compliant modules of this product, please refer to “ Compliant backplane list (CGS-S9901-E-XX) ”.


*Precaution:

- This backplane can not be used as a single configuration of the IO module.
- IO backplane connection of each other, you and up to three-stage connection.

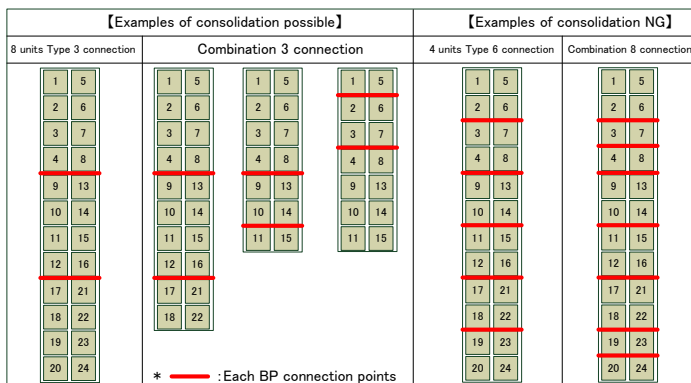


· Following diagram is shown redundant output.

Physical wiring image sample

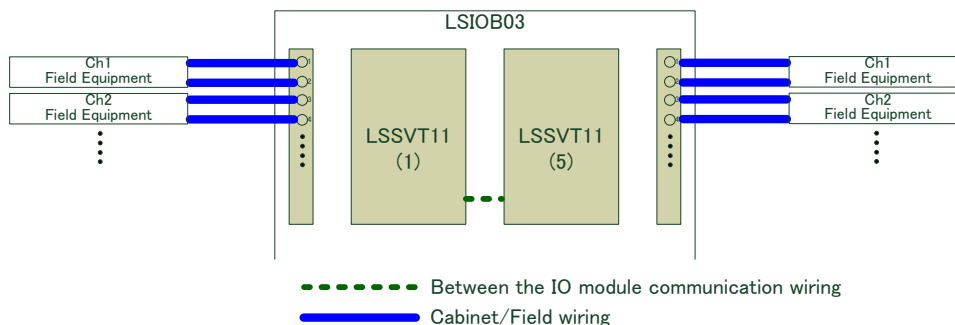


Functional wiring image sample

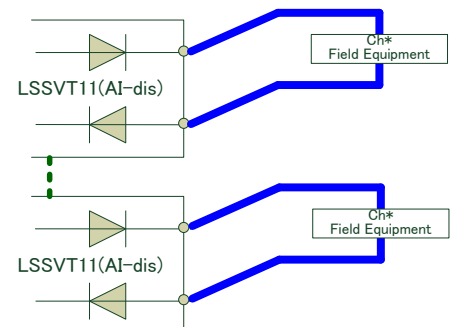

LSIOB03-2 IO backplane module (IO No connection between terminals)

I/O module backplane (Installable 2 I/O modules)

■Block diagram

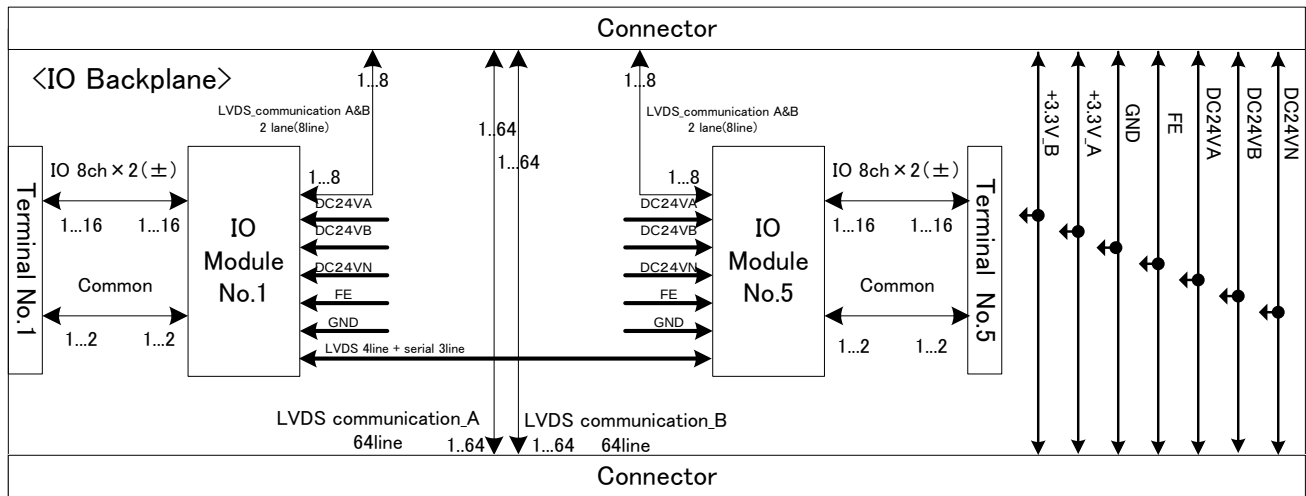

GND : Ground
FE : Functional Earth

When using, please read the instruction manual attached to the product carefully and use it properly.

This catalog may not be distributed or reproduced in whole or in part without permission.

Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.

The service names and product names of other companies described in this catalog are the trademarks of each company.