

SCAIMO1 Safety AI-ISO(A) module

Safety I/O Analog input 4 to 20 mA 8 ch

■Summary



*Number of input channels 8 ch (Channel individual insulation)

★Input range : 4 to 20 mA

Switch: 2

★User interface : (Front panel upper side: for H/W reset,

lower side : unused)

★ Module ambient temperature : -5 to 60°C

*In compliance with Functional Safety Standard IEC 61508



Safety Al-ISO (A) module

Safety I/O Analog input 4 to 20 mA 8 ch

■Specifications

ITEM		SPECIFICATION			
	Number of channels	8 ch (Individual isolation)			
Innut	Range	4 to 20 mA (Full Scale)			
Input	Internal impedance	Less than 250 Ω			
	Signal filter	-3 dB @ 100 Hz			
Safe state		Communication cutoff			
Absolute accuracy		0.1% FS @ 25℃			
Temperature drift		Less than ±100 ppm/°C (relative to full-scale) (@ -5°C to 60°C)			
CMRR(Common mode rejection ratio)		100 dB or more attenuation			
NMRR(Normal mode rejection ratio)		About 30 dB attenuation (In the case of first-order lag filter initial setting value 100 ms)			
Data refresh cycle		1 msec			
Data format		0 to 100%, 0.01% step (0 = 4 mA to 10000 = 20 mA)			
AD conversion type		∠Σ, Successive approximation register(SAR)			
Input filter		Software filter 0 to 65535 msec (All channel set togather by 1 msec step)			
Isolation voltage		AC 500 V Internal circuit(CPU / FPGA) - I/O terminal DC 200 V I/O terminal - PE			
User interface		DC 200 V Between I/O channels Switch 2 (Front panel upper side : for H/W reset, lower side : unused)			
OSET IIILETTACE		Redundant I/O circuit comparison check			
Self diagnosis		Redundant CPU comparison check Quadruplexed A/D converter comparison check ADC stuck check CRC check Data format check I/O signal range check Watchdog timer Communication timeout check Redundant voltage monitor Clock abnormal check Functional check of the abnormal communication signal TPFS (Temporal Programming Flow Supervision): Loss-of-function check for system timers LPFS (Logical Programming Flow Supervision): Loss-of-function check for logical programming flow Open-wire/short-circuit check (Detected as under-range) Overvoltage protection			
Protection	Electrical	Overcurrent protection Double insulated			
	Safety Function	Accuracy for safety function: 1.0% FS @ -5°C to 60°C Abnormal communication signal cutoff			
Indicators		4: Power / Status / Network status A / Network status B			
Current consumption		137 mA			
Weight		Less than 300 g			
Size		152.5 mm (D) x 94 mm (H) x 46 mm (W) (Protrusions excluded)			
Certification body		TÜVSÜD			
Safety integrity level	(IEC 61508-1)	SIL3			
EMC Zone	(EN 61131-2)	B (Dedicated power distribution, rated voltage: 300 V or less)			
Overvoltage category	(IEC 60664-1)	II (Energy-consuming equipment to be supplied from the fixed installation)			
IEC protection class	(IEC 60204-1)	II (Double insulated)			
Isolation method		Channel individual insulation			
Hot-swapping		Supported *However, depending on the field circuit and the application program			
Resolution		16 bit *Two types of AD converters are duplexed.			
Rated voltage		DC 24 V -15% +20% (The voltage supplied from the backplane)			
Environmental conditions	Module ambient temperature	(Operation) -5 to +60°C (Storage) -25 to +85°C			
Vibration	Module ambient humidity	(Operating / Storage) 0 to 95% RH (No condensation)			
Vibration		3.5 mm at 5 to 8.4 Hz, 1 G at 8.4 to 150 Hz			
Shock		15 G 11 ms			

About compliant module type

For compliant modules of this product, please refer to "Compliant backplane list (CGS-S9901-E-XX)".

For compliant modules of this product, please refer to "Compliant accessory connector list (CGS-S9902-E-XX)".







SCAIMO1 Safety AI-ISO(A) module

Safety I/O Analog input 4 to 20 mA 8 ch

■Supported standards/Supported directives

Certified standard	Year	Title
IEC 61508	2010	Functional safety of electrical/electronic/programmable electronic safety-related systems
EN 61131-2	2007	Programmable controllers - Part 2: Equipment requirements and tests
IEC 61131-6	2012	Programmable controllers - Part 6: Functional safety
IEC 61511-1	2004	Functional safety - Safety instrumented systems for the process industry sector - Part 1: Framework, definitions, system, hardware and software requirements,
EN 50156-1	2004	Electrical equipment for furnaces and ancillary equipment - Part 1 : Requirements for application design and installation
ISO 13849-1	2008	Safety of machinery - Safety-related parts of control systems-Part 1:General principles for design
EN 54-2	2007	Fire detection and fire alarm systems Part 2: Control and indicating equipment


Supported directive	Year	Title
RoHS	2011	DIRECTIVE 2011/65/EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment
Low Voltage	2006	DIRECTIVE 2006/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 12 December 2006 on the harmonisation of the laws of Member States relating to Electrical Equipment designed for use within certain voltage limits
EMC	2004	DIRECTIVE 2004/108/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 15 December 2004 on the approximation of the laws of the Member States relating to electromagnetic compatibility and repealing Directive 89/336/EEC
Machinery	2006	DIRECTIVE 2006/42/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 17 May 2006 on machinery, and amending Directive 95/16/EC



SCAIMO1 Safety AI-ISO (A) module

Safety I/O Analog input 4 to 20 mA 8 ch

■Block diagram

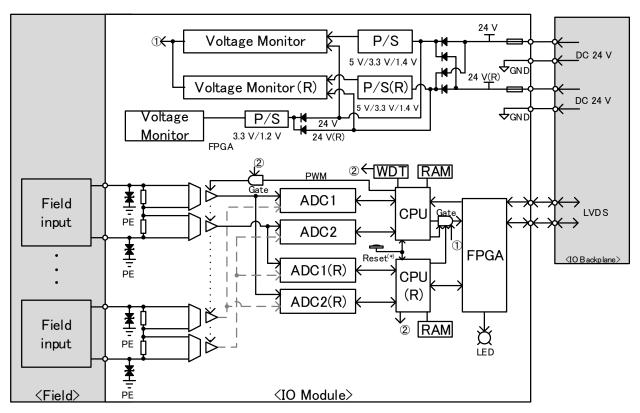

(*) Indicates the H/W reset switch on the upper side of the front panel.

Redundant P/S **Power Supply** LVDS Low Voltage Differential Signaling Field Programmable Gate Array **FPGA** CPU Central Processing Unit RAMRandom Access Memory WDT Watch Dog Timer ADC **Analog Digital Converter PWM** Pulse Width Modulation Gate **Buffer Gate** LED Light Emitting Diode **GND** Ground Protective Earth PΕ FS **Full Scale** ΒP Backplane Resistor Fuse Zener diode

When using, please read the instruction manual attached to the product carefully and use it properly.

This catalog may not be distributed or reproduced in whole or in part without permission.

Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.

DIASYS Netmation/DIASYS Netmation4S is a registered trademark of Mitsubishi Heavy Industries, Ltd.

The service names and product names of other companies described in this catalog are the trademarks or registered trademarks of each company.



MOVE THE WORLD FORW>RD MITSUBISHI HEAVY INDUSTRIES GROUP