

LSACT06 IO backplane connector

Spring type (Push IN), 0.2 to 2.5mm², Screw latch, 18pins

Summary





- * Wire holding structure : Spring type(Push IN)
- * Wire size(Ferrule) : 0.2 to 2.5mm²
- * Connector rock method : Screw latch
- * Number of pins : 18

Specifications

ITEM		SPECIFICATION
Number of pins		18 (1 row)
Pitch		5.08mm
Wire holding structure		Spring type(Push IN)
Power supply(IEC)		400V
Rated current(IEC)		24.0A@20°C
Dielectric strength		4kV (Between neighbor pins)
Wire size		Wire end ferrule with isolation cover 0.2 to 2.5mm ² (AWG24 to AWG14) Flexible 0.2 to 2.5mm ² (AWG24 to AWG14)
Stripping length		10mm
Protection		Safe from finger touch
Flamability class UL94		V-0
Compatible terminal bases		LSIOB01, LSIOB02
Environmental conditions	Ambient temperature	(Operating) -50 to 100°C (Storage) -25 to 55°C
	Ambient humidity	Less than 95%RH (No condensation)
Weight		Less than 0.04kg
Dimensions		20.7mmD x 26.2mmH x 101.3mmW (Except projection)

*About compliant module type

For compliant modules of this product, please refer to “ Compliant accessory connector list (CGS-S9902-E-XX) ”.

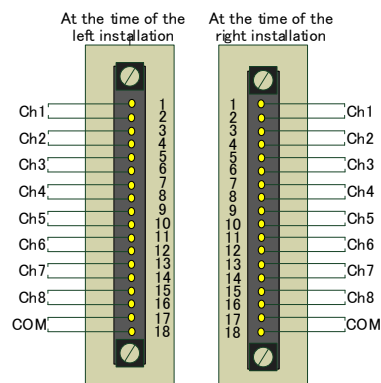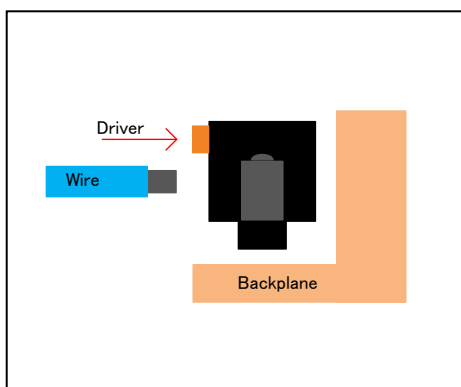

When using, please read the instruction manual attached to the product carefully and use it properly.

This catalog may not be distributed or reproduced in whole or in part without permission.

Please be aware that due to product improvements and modifications, the product description in this catalog may differ in certain respects from the actual product.

The service names and product names of other companies described in this catalog are the trademarks of each company.